

GMC/OMC/SMC 50, 100, 150, 200, 300 INSTALLATION DRAWING

NOTES:

- REFER TO INSTALLATION PROCEDURE AND INSTALLATION CHECKLIST.
- PROCEPTOR SEPARATORS MUST BE INSTALLED IN ACCORDANCE WITH ALL RELEVANT FEDERAL, PROVINCIAL/STATE, AND LOCAL CODES INCLUDING LOCAL PLUMBING CODE.
- US PATENT # 5,746,912; CDN PATENT # 2,195,822

TABLE 2

SEPARATOR MODEL	INLET INVERT TO TANK BOTTOM (H*)	HEIGHT OF BUOYANCY SLAB (HBS)	DRY WEIGHT OF TANK
GMC/OMC/SMC 50	12"	11"	130 lbs
GMC/OMC/SMC 100	20"	14"	150 lbs
GMC/OMC/SMC 150	28"	14"	175 lbs
GMC/OMC/SMC 200	36"	14"	205 lbs
GMC/OMC/SMC 300	52"	14"	255 lbs

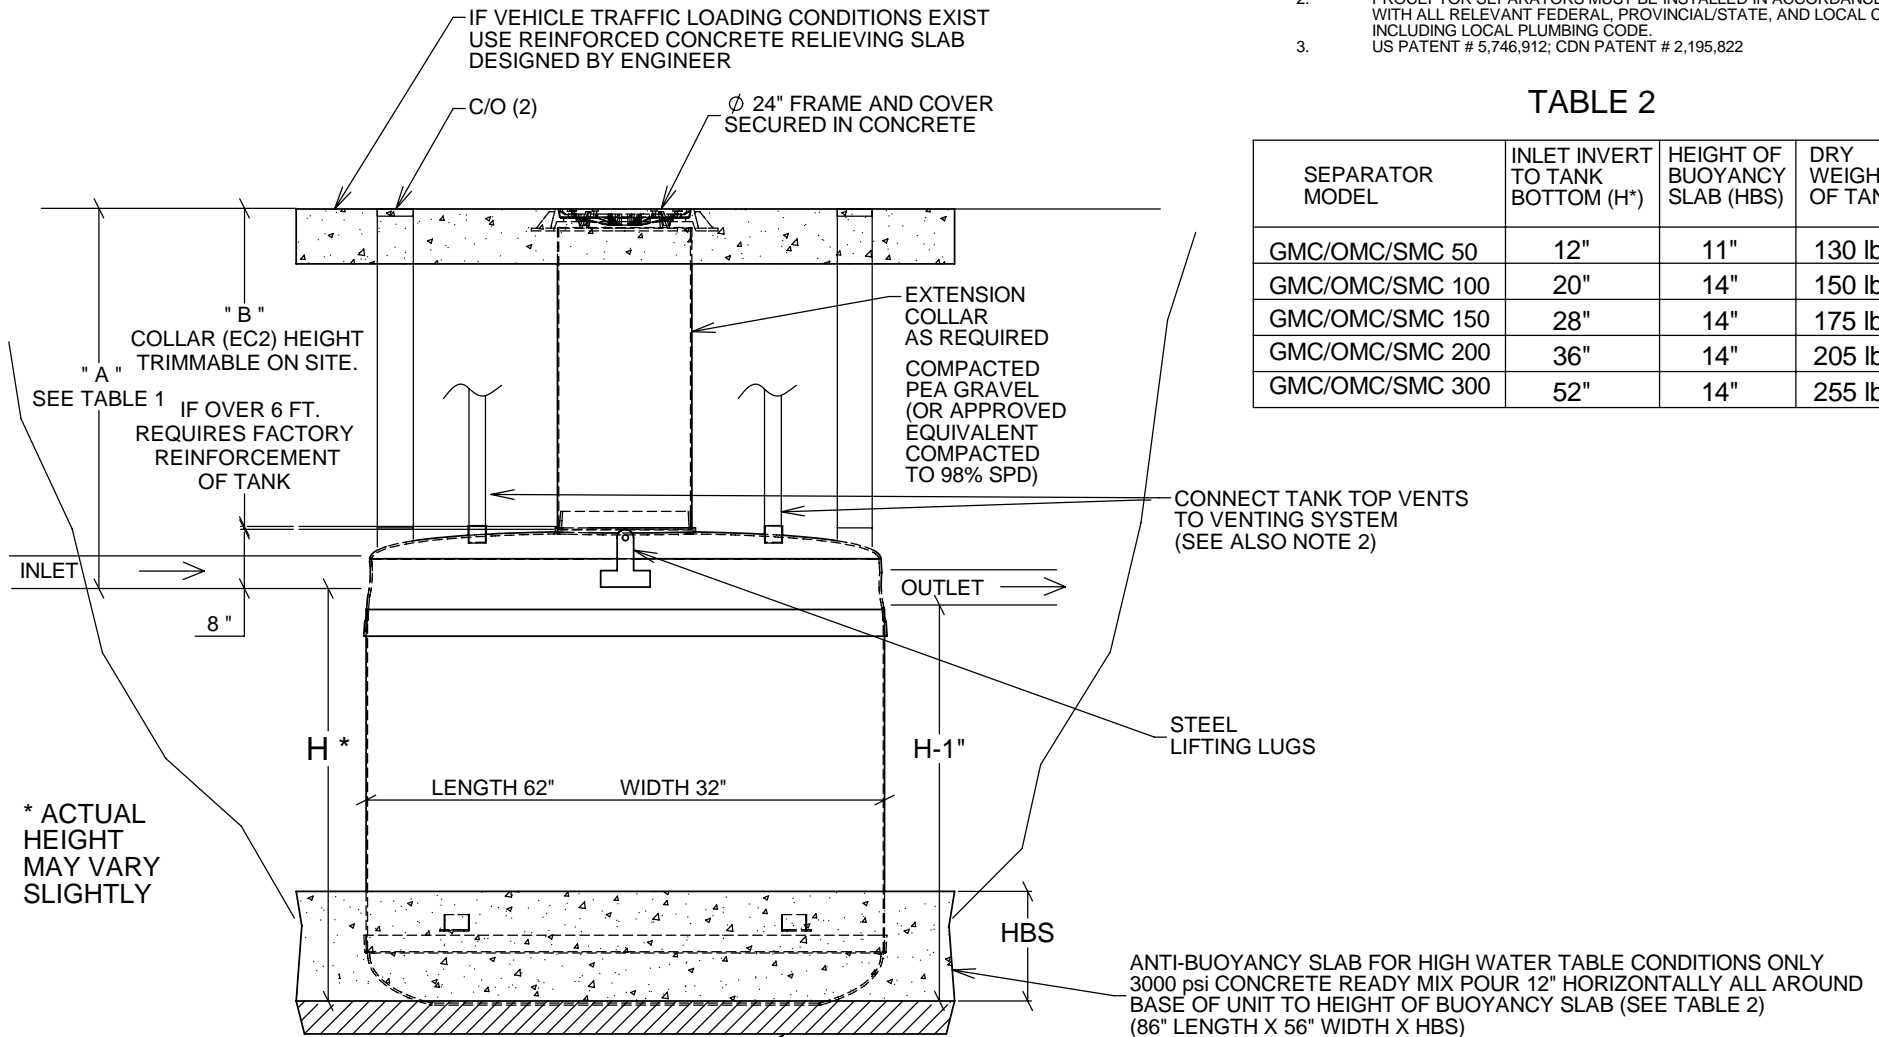


TABLE 1

BURIAL DEPTH	A	B
Max.	6' 8"	6 ft.
Min. with Traffic	30"	22"
Min. no Traffic	18"	** 12"

** MAY VARY DEPENDING ON VENT PIPING AND FLOOR SLAB

TITLE: PROCEPTOR OIL AND GREASE SEPARATOR
INSTALLATION DRAWING
FOR GMC/OMC/SMC MODELS 50-300
ALL DIMENSIONS IN INCHES

PROJECT: WO:

REV	DATE	DRAWN BY
1	JUNE 20, 2007	L. SIMKINS
2	SEPTEMBER 13, 2007	L. SIMKINS
3	APRIL 22, 2008	L. SIMKINS
4		
5		
6		
7		
8		
9		
10		

DRAWN BY: L. SIMKINS
DRAWN DATE: JANUARY 29, 2007

Proceptor™
by greenturtle™

US 877 428 8187 CAN 877 966 9444
www.greenturtletech.com

SIZE	DWG. NO.	REV.
A	INSTALL GMC/OMC 50-300	3

SCALE: 1:35 DO NOT SCALE DRAWING SHEET 1 OF 1